


UX-DOWNLIGHT 212 POLISHED

2x18W,TC-D, MB B2,9003

Order code: DA7401321832000

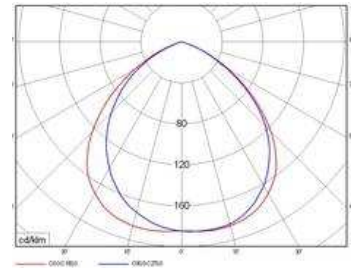

Gross weight	2.00 kg
LOR	43 %
LLPW	24.80 lm/w
Pallette quantity	100 pc

Lighting fixtures Downlights are suitable especially for mounting into different kinds of ceiling boards. The Downlights are best suited to office, classroom, sales areas, showrooms, presentation of merchandise, public buildings, banks, museums, hotels, exhibition halls, entrance areas, decorative entrance areas, foyers, corridors, staircases, conference rooms, etc.

CONSTRUCTION

Housing: galvanized sheet
 Reflectors: aluminium with various types of surface finish – polished, mat
 Reflector cover: sandblasted hardened glass
 Ring: sheet steel, electrostatic powder coat finish RAL 9003 (signal white), other finish types – RAL 9006 (white aluminium), chrome or brass available on request
 Ballast box: galvanized sheet steel, holders to prevent conductors from loosening off the terminal box, two rubber reducing adapters for conductors (through mounting possible)

Ceiling attachment of the luminaire is done using two metal springs, adjustable for various ceiling widths. The cover glass is attached to the luminaire using three springs allowing fast and tool-free light source replacement.

ELECTRICAL COMPONENTS

Luminaires can be equipped with conventional control gear (EEI=B2, standardly not compensated), electronic (EEI=A2) or dimmable electronic control gears (EEI=A1, 1-10V, switch DIM, DALI)

Light sources shall be ordered separately.

ACCESSORIES

- an independent metal box for separate placement of the ballast apart from the luminaire (separate gear box version):
- on request, they can be delivered with one or two connectors allowing fast electrical connection: 3-pole connectors Wieland gesis GST 18i3, Wago Winsta 770, AAG Stucchi 1601A/1602A

	OPTIC		POWER	LAMP	DIMENSIONS				OPENING		EMERGENCY			
	POLISHED	MAT			D1	D2	L1	L1/SB	H1	H2	A1	O1	1H	3H
UX-Downlight 202	*	*	1x13	TC-D,TC-DEL	195	155	305	212	110	54	152	175	*	*
UX-Downlight 202	*	*	1x18	TC-D,TC-DEL	195	155	305	212	110	54	152	175	*	*
UX-Downlight 202	*	*	1x26	TC-D,TC-DEL	195	155	305	212	110	54	152	175	*	*
UX-Downlight 202	*	*	2x13	TC-D,TC-DEL	195	155	305	212	110	54	152	175	*	*
UX-Downlight 202	*	*	2x18	TC-D,TC-DEL	195	155	305	212	110	54	152	175	*	*
UX-Downlight 202	*	*	2x26	TC-D,TC-DEL	195	155	305	212	110	54	15	175	*	*
UX-Downlight 212	*	*	1x18	TC-D,TC-DEL	230	196	359	250	126	70	172	205	*	*
UX-Downlight 212	*	*	1x26	TC-D,TC-DEL	230	196	359	250	126	70	172	205	*	*
UX-Downlight 212	*	*	2x18	TC-D,TC-DEL	230	196	359	250	126	70	172	205	*	*
UX-Downlight 212	*	*	2x26	TC-D,TC-DEL	230	196	359	250	126	70	172	205	*	*
UX-Downlight 222	*	*	1x18	TC-D,TC-DEL	267	228	378	269	143	87	172	240	*	*
UX-Downlight 222	*	*	1x26	TC-D,TC-DEL	267	228	378	269	143	87	172	240	*	*
UX-Downlight 222	*	*	1x32	TC-TEL	267	228	378	269	143	87	172	240	*	*
UX-Downlight 222	*	*	1x42	TC-TEL	267	228	378	269	143	87	172	240	*	*
UX-Downlight 222	*	*	2x18	TC-D,TC-DEL	267	228	378	269	143	87	172	240	*	*
UX-Downlight 222	*	*	2x26	TC-D,TC-DEL	267	228	378	269	143	87	172	240	*	*
UX-Downlight 222	*	*	2x32	TC-TEL	267	228	378	269	143	87	172	240	*	*

